


SPLASH₂0 LIGHT

TECHNICAL DATA SHEET

PRESCRIPTION: Floover SplasH2O Light Flooring, size _____, reference _____ Classification 23/32 or 23/33 with high abrasion resistance, stains resistance class 0 according to norm EN423, fire resistance classification BflS1 and grade 6 of UV resistance. Floover SplasH2O Light is designed as floating flooring for wet areas. It is optional to add Flooverflex backing to improve sound insulation and comfort. Before installing, allow the material to acclimatize for 48 hours in the installation area. The distance from the wall and from all the stable elements must be of 10 mm at least to allow flooring natural movements. SplasH2O Light with Flooverflex can be installed combined with HDF Light for dry areas thanks to their Unilin clic.

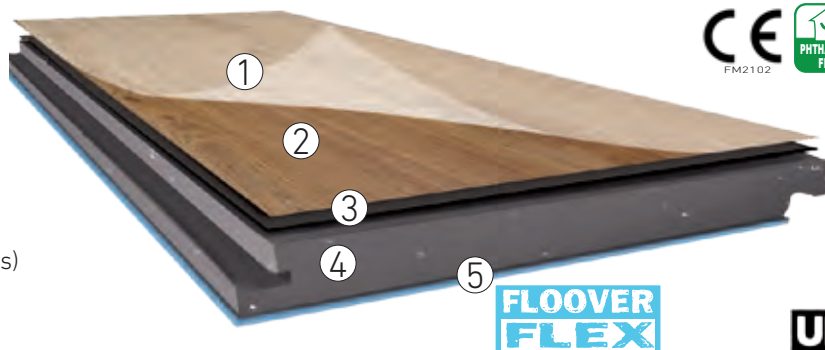

Installation up to 120m² without expansion joints. Maximum length 12m / width 10m

- ① Layer of transparent PVC
- 0,3 mm (Original)
- 0,55 mm (Synchro and Plus)
- ② Printed Decor
- ③ Vinyl
- ④ PVC Rigid 3,2 mm
- ⑤ +1,5mm foam (Optional) +3 dB

Characteristics	Test	SplasH ₂ O Original	SplasH ₂ O Synchro	SplasH ₂ O Plus
Classification	EN 16511	23 / 32	23 / 33	23 / 33
Dimensions	EN 427	915 x 305 mm or 620 x 450 mm (CM,CR,MT,LE) 1235 x 230 mm (NT, UB, LX,SQ)	1235 x 230 mm (Rustic) 1235 x 305 mm (Plank + Endless)	915 x 305 mm or 620x450 (CMT,IRT,CRT) 1235x305 mm (WDT2004)
Thickness	EN 430	5,1 mm 4,9 mm (UB,LX,NT)	5,2 mm	5,2 mm
Weight	EN 430	6,78 - 7,55 Kg/m ²	7,63 - 7,96 Kg/m ²	7,88 - 7,98 Kg/m ²
Residual Indentation	EN 433	max. 0,03 mm	max. 0,03 mm	max. 0,03 mm
Fire Resistance	EN 13501-1	Class BFLs1 (B1)	Class BFLs1 (B1)	Class BFLs1 (B1)
Chemical Resistance	EN 438	Grade 5 (Groups 1 and 2) and Grade 4 (Group 3)	Grade 5 (Groups 1 and 2) and Grade 4 (Group 3)	Grade 5 (Groups 1 and 2) and Grade 4 (Group 3)
Dimensional stability	EN 434	- 0,10 %	- 0,10 %	- 0,10 %
Curving	EN 434	0,5 mm	0,5 mm	0,5 mm
Acoustic Certification	EN ISO 717-2	ΔLw= 17dB	ΔLw= 17dB	ΔLw= 17dB
Cigarette burn resistance	EN 438 - 2	Class 3	Class 3	Class 3
Impact Resistance	EN 1534	7,4 Kgf/mm ²	7,4 Kgf/mm ²	7,4 Kgf/mm ²
Slip/Slide Resistance	EN 12633 DIN 51130	Class 2 R10	Class 2 R10	Class 2 R10
Flexibility	EN 435	10 mm	10 mm	10 mm
UV Resistance	ISO 105	≥ Grade 6	≥ Grade 6	≥ Grade 6
Formaldehyde emission	EN 717	E1	E1	E1
Water Resistant test	EN 317	0% Swelling	0% Swelling	0% Swelling
Thermal Resistance	EN 12664	0,032 m ² K/W*	0,032 m ² K/W*	0,032 m ² K/W*
Locking Strength	ISO 24334	> 500 kg/ml	> 500 kg/ml	> 500 kg/ml
Antistatic Performance	EN 1815	< 2 kv	< 2 kv	< 2 kv
Castor chairs suitability**	EN 425	Continuous use	Continuous use	Continuous use

* Suitable for underfloor heating system / **Suitable for soft polyamide wheels (type W)

