



# WALLS

## TECHNICAL DATA SHEET

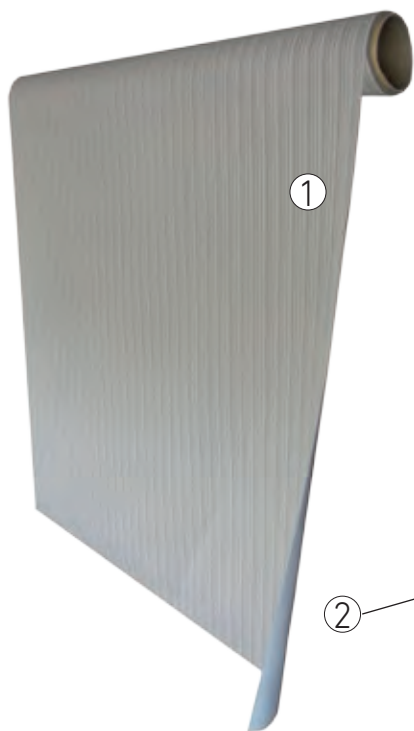

- ① Woven Vinyl 90% PVC FR, 2% Polyester, 8% Glassfibery **1,3 mm**
- ② Polyester Backing: 100% Polyester **0,4 mm**



Characteristics	Test	Woven Walls
Roll width	-	1,00 m
Roll Length	-	30,00 m
Roll diameter	-	0,22/0,24 m
Thickness	-	1,60 mm
Weight	-	750 gr/m <sup>2</sup>
Chemical resistance	EN 423	Class 0
Fire resistance	EN 13501	B-S1 d0
Thermal resistance	EN 12667:2001	0,044 m2 K/W
UV resistance	ISO 105-B02	≥Grade 8
Fungus test	ASTM G21 96	Grade 1
Skew and Bow	EN 427	Max 2%
Dimensional Stability	EN 434:1994	0,05% (X + Y Direction)
Curling	EN 434:1994	1,5 mm
Release of Formaldehyde	-	Pass (120mg/kg)
Release of Vinyl Chloride	-	Monomer -Pass (<0.2mg/kg)
Sound Absorption		$\alpha_w=0.05$
Release of dangerous substances (SVHC)	Test Report: xXMCCM161101593	Pass



**NOTE:** Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.