


LOOSE LAY

TECHNICAL DATA SHEET

PRESCRIPTION: Floover Woven Loose Lay, size 500x500x4,2/3,2mm, reference _____, made with vinyl threads with fiberglass that highly improves its stability. Classification 23/33 with high abrasion resistance, stains resistance class 0 according to norm EN423, fire resistance classification BflS1 and grade 6 of UV resistance. Allow the material to acclimatize to the ambient conditions for 24 hours before installation. It is designed to be installed with non-permanent adhesive on a perfectly levelled subfloor.

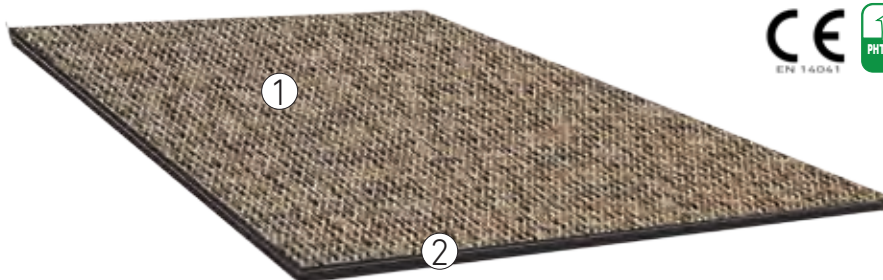

① Woven Vinyl

② PVC + FiberGlass + PVC


Characteristics	Test	Woven Loose Lay*
Classification	EN 685	23/33
Dimensions	EN 427	500 x 500 mm
Thickness	EN 430	4,2 mm
Weight	EN 430	5,50 kg/m ²
Abrasion resistance	EN 660-1: 99	0,068 mm
	EN 660-2: 99	1,80 mm ³
Chemical resistance	EN 423	Class 0
Fire resistance	EN 13501-1	Class BFLs1 (B1)
Thermal resistance	EN 12664	0,0639 m2 K/W**
Formaldehyde emission	EN 717	E1
UV Resistance	ISO 105 - B02	> Grade 6
Fungus test	ASTM G21:96	Grade 1
Skew and Bow	EN 427	Max 2%
Slip/Slide resistance	EN 12633	Class 2
	DIN 51130	R10
Residual Indentation	EN 433:1994	0.08mm
Dimensional Stability	EN 434:1994	0.05% (X + Y direction)
Curling	EN 434:1994	1.5mm
Assessment of Static Electrical Propensity I	EN 1815	< 2 kV
Acoustics Performance	EN ISO 717-2	Lw=15dB Cl=-8dB
Castor chair suitability***	EN 985	Continuous use

Characteristics	Test	Woven Loose Lay (Jacquard decors)
Classification	EN 685	23/33
Dimensions	EN 427	500 x 500 mm
Thickness	EN 430	3,2 mm
Weight	EN 430	4,50 kg/m ²
Fire resistance	EN 13501-1	Class BFLs1 (B1)
Light Fastness	ISO 105 - B02	> Grade 7
Slip resistance	EN 13893	< 0,3
Dimensional stability	EN 986	< 0,1%
Doming & curling	EN 986	meets the requirements
Antistatic	ISO 6356	< 2 kV
Acoustic performance	EN ISO 717-2	Lw=14dB
Castor chair suitability	EN 985	Intensive use

* Recommended tiles fitting pattern: chessboard system

** Suitable for underfloor heating system

*** Suitable for soft polyamide wheels (type W)

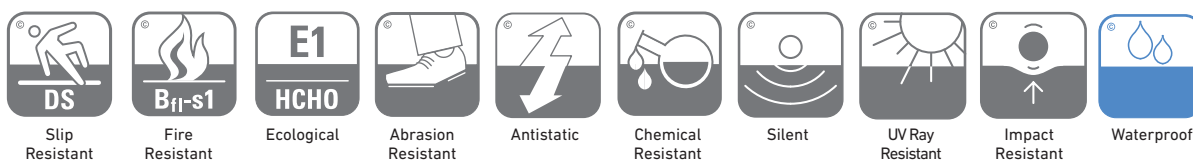

NOTE: Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.